


D4 Std Line



Product Description

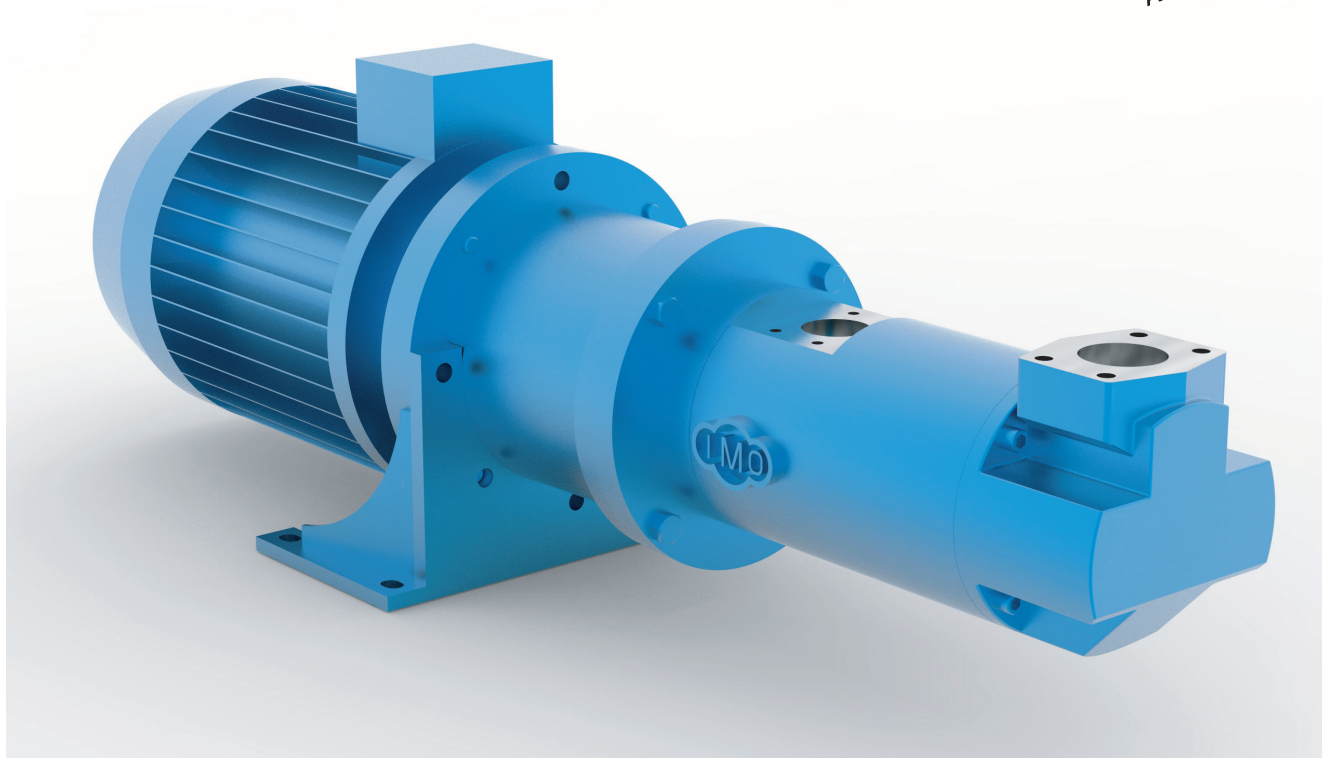

Flow volume:	10 - 1050 l/min
Max differential pressure:	16 MPa
Applications:	Burner, hydraulic and circulation system

1. Applications

1.1 Functionality

The D4 pumps are used for a number of different fluids:

Lube oil, hydraulic oil, diesel & fuel oil and any non-aggressive fluid with sufficient lubricating properties.

1.2 Applications

Typical applications are:

- Fuel oil burner pumps for steam boilers (at paper mills, marine boilers, power plants)
- Circulation of fuel oil
- Lubrication oil systems
- Power hydraulic pumps for milling plants
- Filling pumps for hydraulic presses
- Seal oil pumps for compressors

1.3 Use in potentially explosive areas

The pump fulfils the requirements according to EU explosion-protection directive 2014/34/EU (ATEX 100a) for devices in device class II, category 2G.

Classification into temperature classes according to DIN EN 80079-36 depends on the temperature of the pumped liquid.

Refer to the proposal or order documentation for the maximum permissible liquid temperature for the respective temperature classes.

Note: When operating the pump in category 2, suitable measures must be provided to prevent impermissible warming of the pump surfaces in the event of disturbance.


1.4 Installation

The pump is designed to be flange mounted to its electrical motor via a connection frame and a flexible shaft coupling. By the angle bracket, the pump may be mounted horizontally or vertically.

As standard, counter flanges are included.

For more information about installation, see Installation and Start-up instructions for medium and high pressure pumps.

2. Pump model code

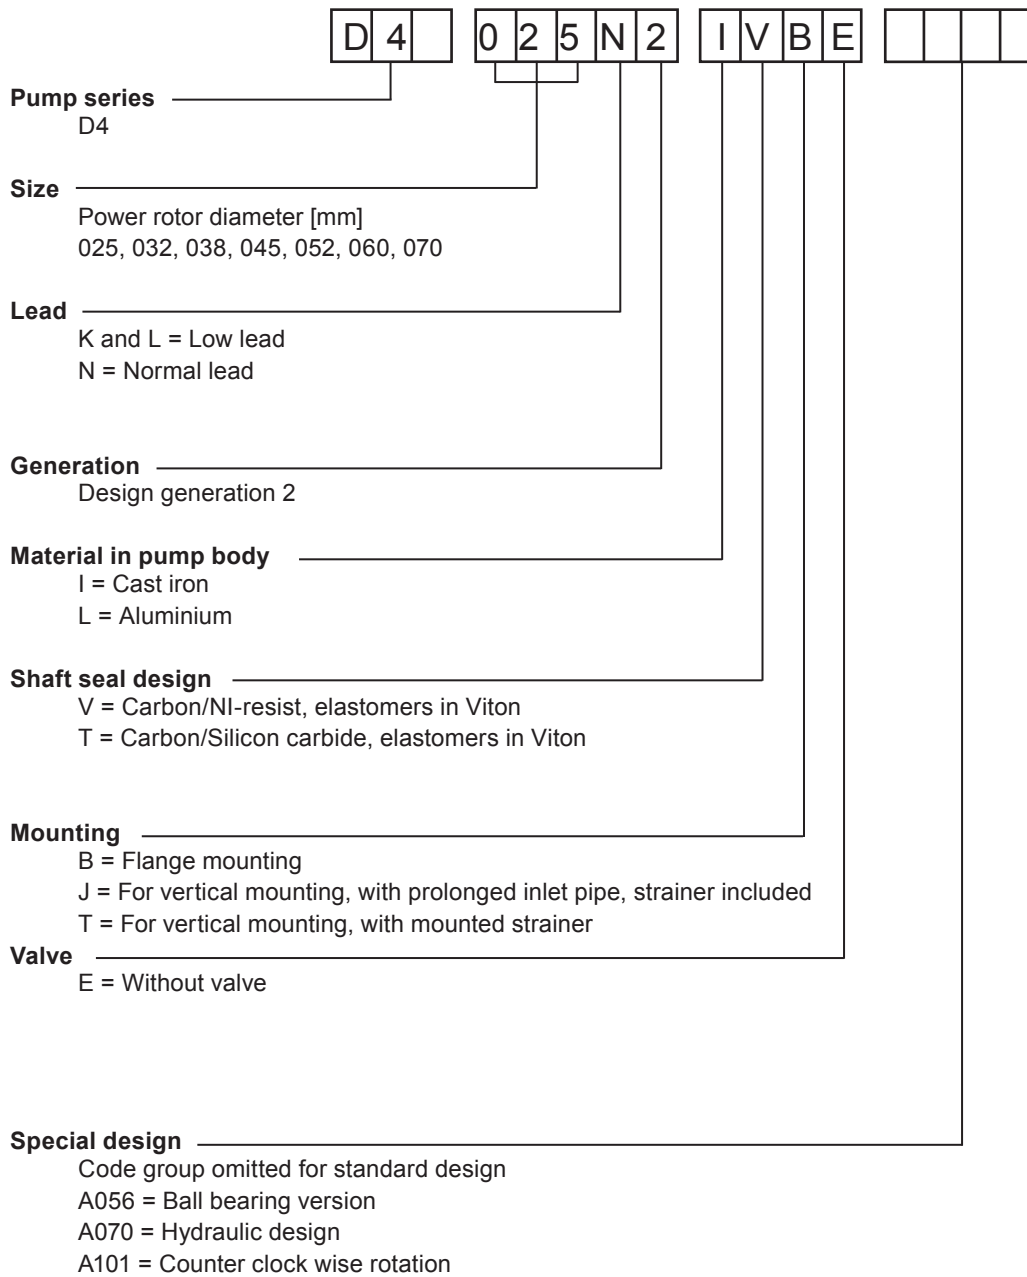

3. Technical Data

3.1 Pressure Information

Inlet pressure

Minimum inlet pressure (suction capability) is dependent on fluid viscosity and rotation speed. It increases with decreasing viscosity and decreasing speed. Information about minimum inlet pressure for each individual duty case can be obtained from IMO AB or pump selection software WinPump.

Maximum inlet pressure (suction capability) is 1 MPa.

Discharge pressure

Max. Discharge Pressure
- Model D4: 16 MPa

Differential pressure

Maximum differential pressure is 16 MPa for D4 but reduced at low viscosities according to table below

D4

Viscosity [cSt]	1,4	2	6	10	30	>55
Max. diff. pressure [MPa]	-	3,5	6,2	8,0	12,5	16,0

Refer to your IMO representative or use the pump selection software WinPump to determine the exact operating limits.

3.2 Driver information

Driver type

The pump is designed to be connected to an electrical motor by a flexible shaft coupling which must allow a axial pump movement if min. 0,3 mm. Axial or transverse load on pump shaft is not allowed.

Speed

The maximum speed is 3600 rpm. Maximum operating speed may be reduced depending on inlet conditions. Contact IMO or use the pump selection software WinPump to find a corresponding speed limit in order to avoid cavitation problems.

Rotation

The pump is designed to operate in one rotational direction only, as standard clockwise when facing the shaft end. Pumps for CCW operation can be delivered on special request.

3.3 Sound level

Typical pump sound levels refer to free field conditions at a distance of 1 m from the pump. Noise of driver excluded in the quoted figures.

The sound levels are measured at speed 2900 rpm and viscosity 20 cSt.

Pump Size	025	032	038	045	052	060	070
Sound level @ 2 MPa dB[A]	55	56	60	63	67	70	72
Sound level @ 10 MPa dB[A]	57	59	62	66	69	72	75

3. Technical Data

3.4 Moment of Inertia

Moment of inertia [10^{-6} kgm²]

Size	025	032	038	045	052	060	070
Value	20	70	170	400	800	1700	3600

3.5 Fluid viscosity

2 – 400 cSt in general for D4.
For higher viscosity, contact IMO AB.

3.6 Fluid temperature

Pump version
LVxx: 0 – +130 °C
IVxx: -10 – +130 °C
ITxx: -10 – +155 °C

4. Design

4.1 Configuration

The D4 pump is available as following models (flange mounted):

- D4 xxxE: without built-in pressure relief valve (radial inlet)
- D4 xxTE: built-on inlet strainer for tank-top mounting for shallow tank operation, no built-in pressure relief valve
- D4 xxJE: as D4 xxTE with extended inlet pipe for deep tank operation, no built-in pressure relief valve

4.2 Filtration

In order to protect the D4 pump from foreign matter such as weld slag, weld beads, pipe scale and rust etc. a strainer should be installed on the pump inlet pipe near the pump. Recommended strainer-open mesh width for the D4 pump is:

- 400 – 800 µm at flow rates below 300 l/min
- 600 – 1000 µm at flow rates above 300 l/min

Max. pressure difference over clean strainer: 10 kPa at full flow rate.

The built-on strainer of pumps D4 xxTx & xxJx have an open mesh width of 500 µm (40 mesh straining cloth). When the D4 pump is used in power hydraulic systems or as lube/seal oil pump, no extra filtering precautions are required other than those prescribed for the remaining components in the system. If no other filtration is prescribed it is recommended that the hydraulic fluid of a power hydraulic system is pumped through a filter – in the return line to the fluid reservoir or in a separate fluid reconditioning circuit – with an open-mesh width as follows:

- 100µm at system pressure below 10 MPa
- 50µm at system pressure above 10 MPa

Max. pressure difference over clean filter: 0.1 MPa at full flow rate.

4.3 Ball bearing

As standard, D4 pump does not have ball bearing.

For ball bearing version use special design code A056.

For ball bearing version; the ball bearing is placed inside the pump and is therefor continuously greased by the handling media.

4.4 Design material

Model	Material pump	Material rotor	Material idler	Material seal	Material Elastomers
D4 LVxx	Aluminium	Steel	Steel	Carbon/Ni resist	Viton
D4 IVxx	Cast iron	Steel	Steel	Carbon/Ni resist	Viton
D4 ITxx	Cast iron	Steel	Steel	Carbon/Silicon carbide	Viton


5. Performance

Typical performance values at 3,5 MPa

Flow calculated at 26 cSt, power at 260 cSt.

For values under other operating conditions, refer to the IMO AB pump selection software WinPump.

Pump performance established according to VDMA 24284.

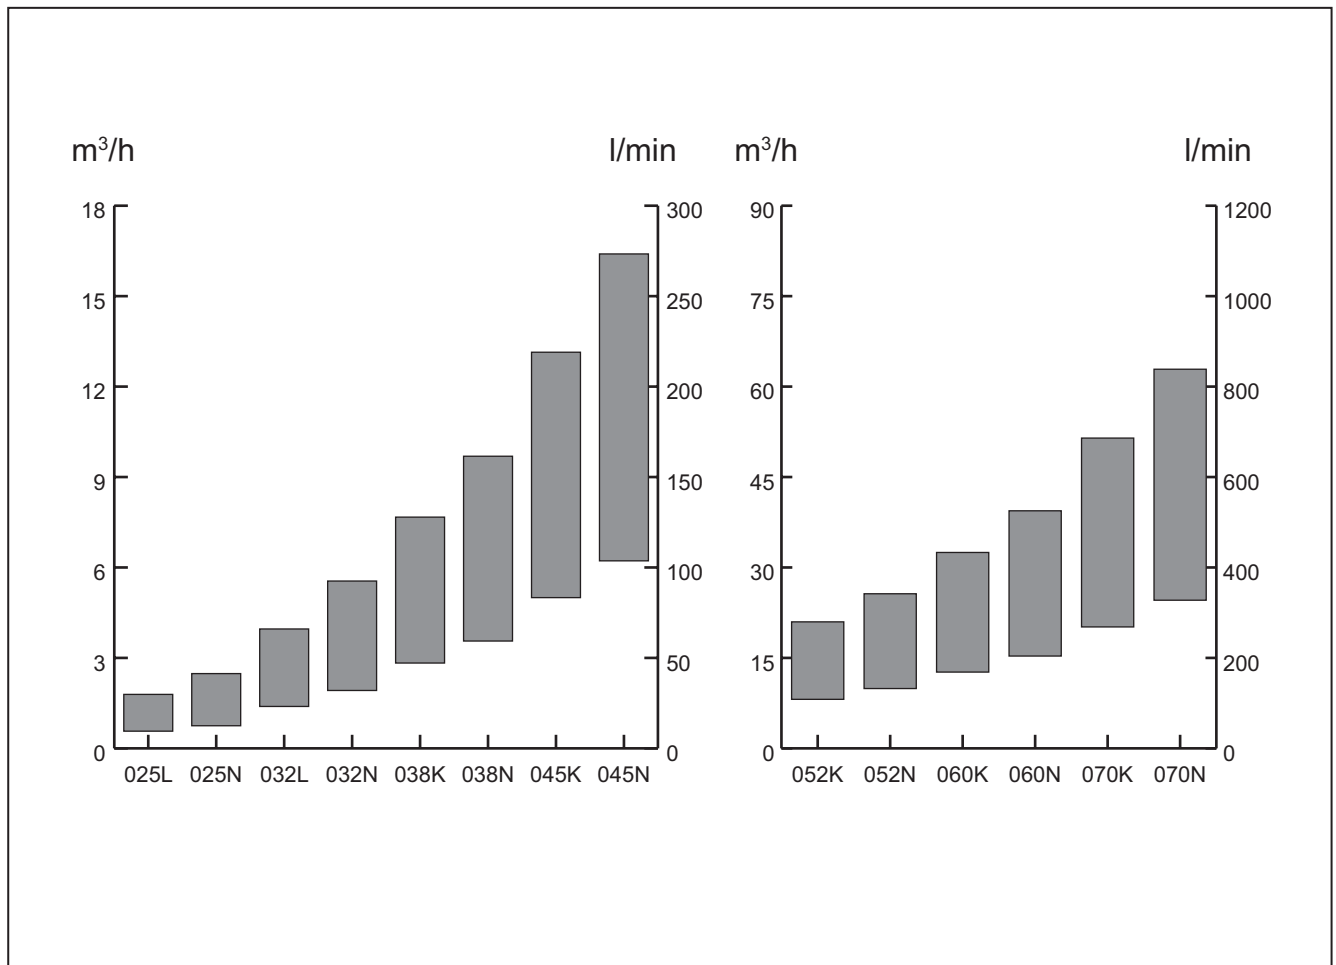

	025L		025N		032L		032N	
rpm	l/min	kW	l/min	kW	l/min	kW	l/min	kW
1470	9,6	1,0	12,5	1,4	23,2	2,0	32,0	2,8
1770	12,5	1,2	16,7	1,6	29,3	2,4	40,7	3,5
2950	24,1	2,0	33,1	2,9	53,7	4,2	75,1	6,0
3550	30,0	2,5	41,4	3,5	66,1	5,2	92,5	7,3

	038K		038N		045K		045N	
rpm	l/min	kW	l/min	kW	l/min	kW	l/min	kW
1470	47,1	3,8	59,4	4,8	83,3	1,0	103,7	1,4
1770	58,8	4,6	74,1	5,8	102,9	1,2	128,1	1,6
2950	104,6	8,0	132,1	10,1	179,8	2,0	224,4	2,9
3550	127,8	9,7	161,5	12,3	218,9	2,5	273,4	3,5

	052K		052N		060K		060N		070K		070N	
rpm	l/min	kW	l/min	kW	l/min	kW	l/min	kW	l/min	kW	l/min	kW
1470	135,6	2,0	165,4	2,8	210,8	3,8	255,1	4,8	335,7	3,8	409,5	4,8
1770	166,5	2,4	203,2	3,5	258,5	4,6	313,0	5,8	411,0	4,6	501,6	5,8
2950	288,0	4,2	351,9	6,0	446,2	8,0	540,7	10,1	707,2	8,0	863,8	10,1
3550	349,8	5,2	427,5	7,3	541,6	9,7	656,5	12,3	857,8	9,7	1048,0	12,3




6. Pump dimensions

Size	025	032	038	045	052	060	070
Main dimensions	A1	342	409	455	526	576	667
	A2	388	439	501	596	636	765
	A3	360	411	462	518	574	658
	A4	359	410	449	523	550	622
	B	44	48	58	59	77	86
	B1	70	75	85	85	100	125
	C	85	85	100	117	117	145
	D	90	90	107	115	128	142
	E	138	197	206	244	276	314
	Mmin	150	157	173	205	252	297
	V1	105	105	125	125	140	160
	V2	100	100	125	160	190	225
	H	4	4	5	5	5	5
	HG	15	15	20	20	20	30
	J	145	145	165	240	240	265
	K	175	175	200	275	275	300
	L*	120	120	130	205	205	230
LG	4	4	4	4	4	4	
Mounting Flange		11	14	18	18	18	18
	P	25	25	32	38	48	60
	T	25	30	38	48	58	73
	R	19	19	25	32	38	48
	P	1"	1"	1 1/4"	1 1/2"	2"	2 1/2"
Outlet/Inlet Ports	T	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
	R	3/4"	3/4"	1"	1 1/4"	1 1/2"	2"
	W	36	36	42	58	58	82
Outlet/Inlet Counter Flanges Size	X**	19	19	24	32	32	42
	Key***	6x6	6x6	8x7	10x8	10x8	12x8
	D4F/B/TV	10-11	12-13	14-15	24-25	33-35	48-51
Appr. Weight kg							66-68

8. Pump unit

Pump size	TEFC Electric motor IEC no.	Mounting flange	Unit Mount			Approx. weight without el. motor (kg)			Overall length A										
			I	II	III	I	II/III	III/III	xxBE	xxTE	xxJE	A1	V	C1	D1	G1	C2	D2	G2
025	80, 90	F165	.	.	.	14 - 15	13 - 14	745	818	967	350	138	126	204	95	80/90	278/284	100/125	26
	100, 112	F215	.	.	.	16 - 17	15 - 16	800	880	1029	395	148	152	217	115	100/112	301/308	140	26
	132	F265	.	.	.	19 - 20	17 - 18	862	1072	1221	435	170	183	231	140	132	349	140/178	35
	160, 180	F300	.	.	.	23 - 26	20 - 22	1054	*	*	597	200	210	260	170	160	398/411	210-279	37
032	80/90	F165	.	.	.	16 - 17	15 - 16	812	*	*	350	138	126	204	95	80/90	278/284	100/125	26
	100, 112	F215	.	.	.	18 - 19	17 - 18	867	869	1029	395	148	152	217	115	100/112	301/308	140	26
	132	F265	.	.	.	21 - 22	19 - 20	929	931	1087	435	170	183	231	140	132	349	140/178	35
	160, 180	F300	.	.	.	25 - 28	22 - 24	1121	1123	1279	597	200	210	260	170	160/180	398/411	210-279	37
038	100, 112	F215	.	.	.	23 - 24	21 - 22	915	*	*	335	165	152	251	115	100/112	335/342	140	35
	132	F265	.	.	.	24 - 25	21 - 22	980	987	1147	435	190	183	268	140	132	386	140/178	35
	160, 180	F300	.	.	.	28 - 30	24 - 26	1166	1175	1335	597	216	210	297	170	160/180	431-444	210-279	33
	200	F350	.	.	.	36 - 37	31 - 32	1270	1277	1437	700	215	240	295	200	200	455	305	34
045	100, 112	F215	.	.	.	33 - 34	32 - 33	984	*	*	395	180	152	128	115	100/112	128	115	26
	132	F265	.	.	.	36 - 37	34 - 35	1044	*	*	435	200	183	301	140	132	404	140/178	26
	160, 180	F300	.	.	.	40 - 42	36 - 39	1241	1123	1443	597	235	210	310	170	160/180	458/471	210-279	24
	200	F350	.	.	.	47 - 48	42 - 43	1339	1331	1541	700	230	240	328	200	200	478	305	35
052	225	F400	.	.	.		43 - 44	1489	1481	1691	850	230	240			225	494	286/311	24
	225	F400 - 140	.	.	.		50 - 51	1524	1516	1726	850	230	240			225	529	286/311	35
	250, 280	F500	.	.	.		47 - 54	1674	1666	1876	1000	260				250/280	548/570	349-419	26
	132	F265	.	.	.	45 - 47	43 - 45	1094	*	*	435	200	183	314	140	132	417	140/178	26
060	160, 180	F300	.	.	.	49 - 52	45 - 49	1291	1289	1517	597	235	210	323	170	160/180	471-484	210-279	24
	200	F350	.	.	.	56 - 58	51 - 53	1389	1387	1615	700	230	240	200	200	200	491	305	35
	225	F400	.	.	.		52 - 54	1539	1537	1765	850	230				225	507	286/311	35
	225	F400 - 140	.	.	.		59 - 61	1574	1572	1800	1000	265				250/280	542	349-419	26
070	250, 280	F500	.	.	.		56 - 64	1724	1722	1950	1000	260				250/280	561-583	349-419	26
	315	F600	.	.	.		69 - 71	1749	1747	1975	1030	260				315	604	406/457	35
	160, 180	F300	.	.	.	65 - 70	62 - 66	1380	*	*	597	261	210	377	170	160/180	511-524	210-279	24
	200	F350	.	.	.	72 - 75	67 - 70	1492	1483	1744	700	270	240	395	200	200	545	305	24
070	225	F400	.	.	.		69 - 72	1637	1628	1889	850	265				225	556	286/311	35
	225	F400 - 140	.	.	.		72 - 75	1672	1663	1924	1000	300				250/280	591	349-419	25
	250, 280	F500	.	.	.		78 - 87	1822	1813	2074	1000	300				250/280	610-632	349-419	21
	315	F600	.	.	.		86 - 89	1847	1838	2099	1030	295				315	653	406/457	30
070	315	F600 - 170	.	.	.		98 - 101	1887	1878	2139	1030	335				315	693	406/457	30
	160, 180	F300	.	.	.	83 - 87	80 - 83	1449	*	*	597	261	210	377	170	160/180	511-524	210-279	24
	200	F350	.	.	.	90 - 92	85 - 87	1561	1573	1830	700	270	240	395	200	200	545	305	24
	225	F400	.	.	.		87 - 89	1706	1718	1948	850	265				225	556	286/311	35
250, 280	225	F400 - 140	.	.	.		90 - 92	1741	1753	2010	1000	300				250/280	591	349-419	25
	315	F500	.	.	.		96 - 104	1891	1903	2160	1000	300				250/280	610-632	349-419	21
	315	F600	.	.	.		104 - 106	1916	1928	2185	1030	295				315	653	406/457	30
	315	F600 - 170	.	.	.		116 - 118	1956	1968	2225	1030	335				315	693	406/457	30

8. Pump unit

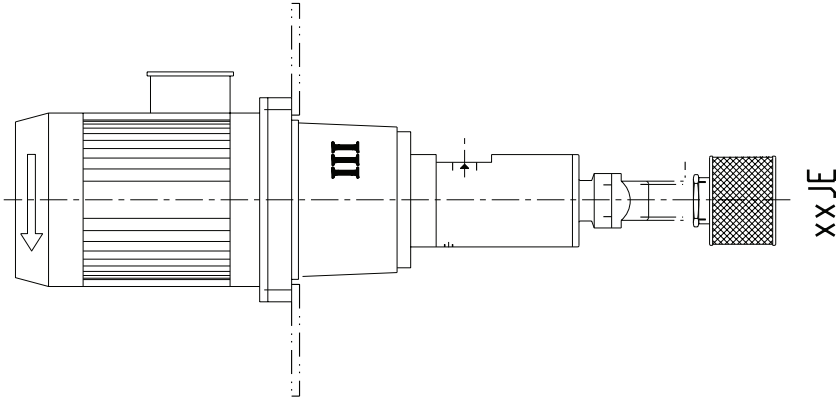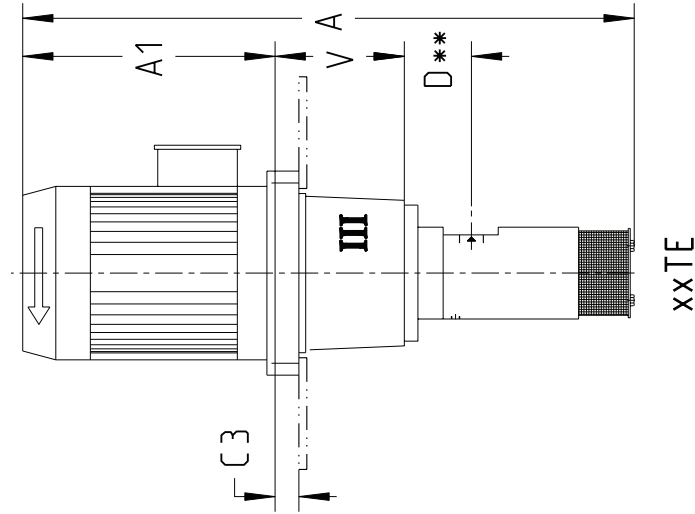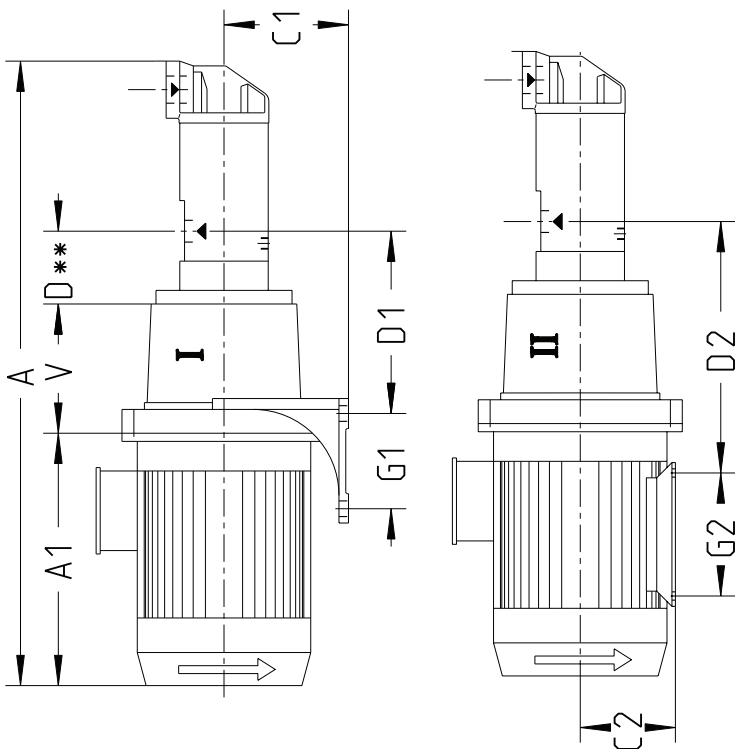

Remarks:


1. TEFC = totally enclosed (IP 54) Fan Cooled (IC 41). For other motor types compare mounting flange size with column "Mounting Flange".
2. Denomination of electric motor mounting flange (= connecting frame size) refers to pitch diameter of holes for mounting bolts and length of the longer motor shaft (if more than one shaft length per IEC No.).
- * Can not be mounted as a complete pump aggregate through the hole in the tanktop

** Identical to dimension D of pump dimension table on page 8

3. Dimensions A and A1 may vary with make of electric motor.
4. D4 xxJE: Overall length A corresponds to min length of pump inlet pipe.
5. For certain motor sizes the motor mounting flange projects (max 25 mm) below the motor foot.
6. Size 045 with F215 in Unit Mount I: Frame angle bracket mounted with floor fastening bolts under the connecting frame (reversed position compared to that shown in Unit Mount I).

9. Counter flanges

Flange size	Weld Connection Dimensions							Common Dimensions						
	A	B	C	D	E	G	H	F	J	K	L	M		
3/4"	27	20	14	40	30	66	52	M10	22.4	11.2	23.9	47.8		
1"	38	25	16	45	35*	70	59	M10**	26.2	13.1	26.2	52.4		
1 1/4"	43	32	14	50	35*	80	73	M10	30.2	15.1	29.4	58.7		
1 1/2"	50	40	16	50	40*	94	84	M12	35.8	17.9	34.9	69.8		
2"	62	50	17	55	40*	101.5	97	M12	43	21.5	39	78		
2 1/2"	72	60	19	75	45	114	109	M12	51	25.5	44.5	89		
3"	90	75	22	85	55	135	131	M16	62	31	53	106		
4"	114	100	26	90	55	162	152	M16	78	39	65	130		

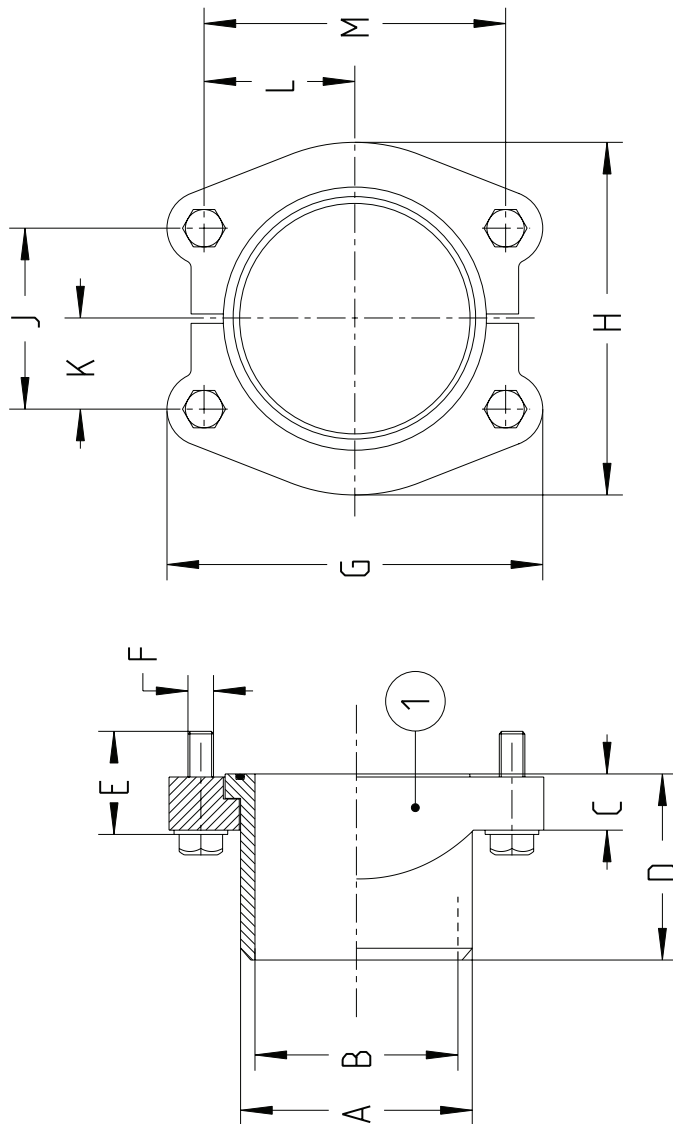

Notes:

- * Pipe weld connection set size 1", 1 1/4", 1 1/2"
- ** M8 for use on original designs N1 and L1.

Pipe weld connection set comprising pipe weld "O" ring SAE JS 18 split flange and bolts- bolts in steel property Class ISO 8.8 and with min. length E.

Drawing remarks:
(1) Weld connection

10. Accessories

For the D4 xxBE, xxJE and xxTE pumps, following standard accessories are available:

- Circular frame for connecting the pump to flange/foot mount IM 2001 and flange mount IM 3011 IEC Standard electric motors
- Circular frame with angle foot for connecting the pump to IM 3001 IEC Standard electric motor
- Flexible shaft coupling
- Inlet/ outlet counter flange set for pipe weld connection or pipe thread connection

11. Maintenance

Spare parts for these pumps are easily available from stock. For detailed information and know-how about service, see the Maintenance & Service Instruction for D4 pumps or contact IMO AB.

Adress:

IMO AB
PO Box 42090, 126 14 Stockholm
Sweden