


# P-SERIES - P10 S



Please note that when a pump is fitted with Teflon® diaphragms, a capacity reduction of up to 15% may occur.

MATERIAL			SPECIFICATION						
Pump housing	Diaphragms	Valve balls	Max capacity	Max working pressure	Max Temp.	Liquid connection	Air connection	Particle size max.	Weight
SS316L	PTFE, Buna-N, EPDM, Vitron®	PTFE, Buna-N, EPDM, Vitron®	20 l/min	10 bar	100 °C	R½" male TC 1"	R¼" female	3mm	7 kg

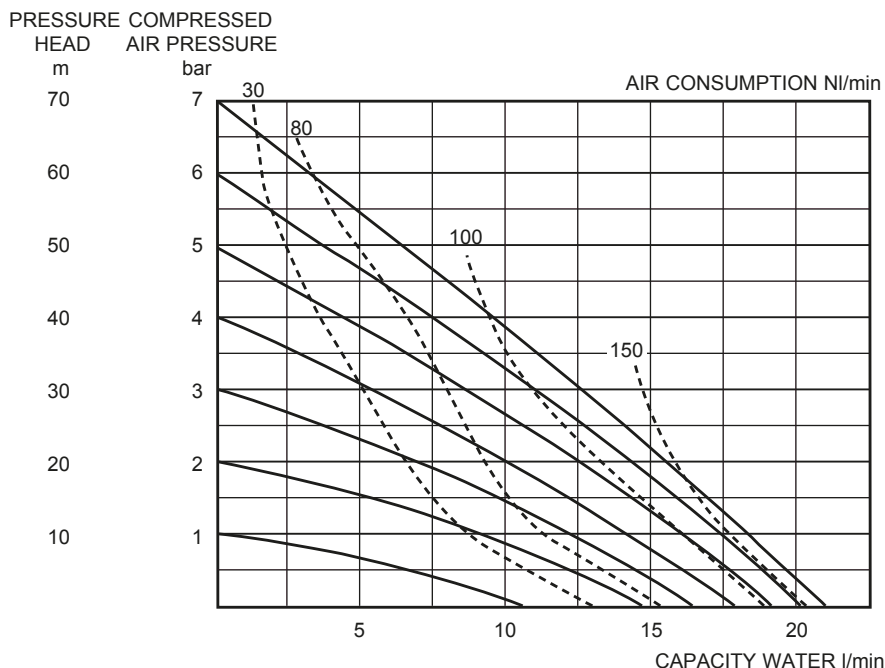